

Polaris dimmer remote BD1210R8

Technical Parameters

Input and Output	
Output signal	RF(2.4GHz)
Working voltage	3VDC (AAAx2)
Working current	<5mA
Standby current	<10µA
Standby time	1 year
Remote distance	30m



20200527

FC CE RoHS emc RED

BD1210R8
8 zone dimming



8 zone dimming, touch wheel, wireless remote 30 m distance, AAAx2 battery, Magnet stuck fix

Features


- Ultra sensitive brightness adjustment touch wheel.
- Each remote can be paired with up to 8 Polaris dimmer units (BD1210).
- AAAx2 battery powered.
- Operate with LED indicator light.
- Magnet on the back which can be easily stuck on back holder or any metal surfaces.

Safety and EMC

EMC standard (EMC)	EN301 489, EN 62479
Safety standard(LVD)	EN60950
Radio Equipment(RED)	EN300 328
Certification	CE, EMC, LVD, RED

Environment

Operation temperature	-30°C ~ +55°C
IP rating	IP20

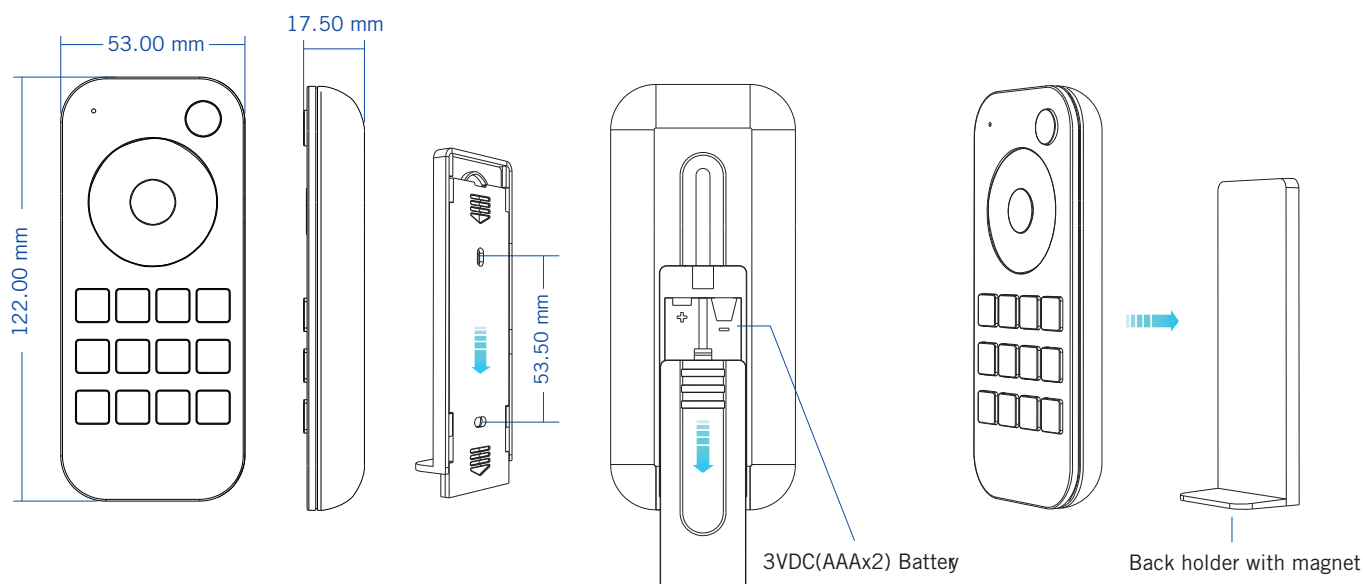

To fix the remote, three options are offered for selection:

Option 1: stuck the remote on any metal surfaces directly.

Option 2: fix the remote's back holder on the wall with two screws.

Polaris dimmer remote BD1210R8


Pair:

Short press pair key on BD1210, immediately press on/off key on BD1210R or zone key on BD1210R8.

Delete:

Press and hold pair key for 5s to delete all pairing. The light blinks 5 times means all paired remotes were deleted.

Polaris dimmer remote BD1210R8

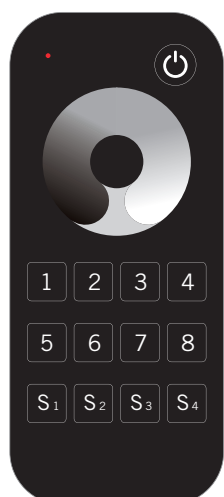

: Short press turn on/off all zone light.



: Touch to change current zone brightness.



: Short press select and turn on zone light, long press 2s turn off zone light. Short press multiple zone key fastly, will select multiple zone synchronously.



: Short press recall the scene, long press 2s save current state into S1/ 2/ 3/ 4. 8 zone recall or save synchronously.